

Linear

Radiant Gas Fireplaces



ENJOY THE WARMTH
OF OUR LINEAR FIREPLACES.

 **valor**

THE SCIENCE OF WARMTH™

We pioneered and continually work to improve radiant heat technology to generate constant, comfortable warmth in your home.

RADIANT HEAT

We put radiant warmth into every fire. You can feel it.

ENHANCED FLAME

Our fires create realistic, soothing flames and ambient glowing embers that radiate heat.

SAFETY

Our fires are put through rigorous safety testing in our in-house CSA approved lab.

ALUMINIZED STEEL

Lightweight, high temperature aluminized steel firebox and heat exchanger deliver efficient warmth.

V-CLASS BURNER

High temperature precision stainless steel burner creates a new level of radiant fire and aesthetics.

ON COVER:

L1
BIRCH 1505BLKV2
FLUTED BLACK LINER 1515FBL
1" ADJUSTABLE TRIM 1575LFB

PROUDLY MADE
IN NORTH AMERICA



HEATSHIFT SYSTEM®

HeatShift redirects the convective heat from our fireplaces, helping valued artwork, a TV or construction materials stay cooler.

ADJUSTABLE HEAT

Our remote controls provide adjustable flame for constant, even warmth without having to cycle the fire on and off.

EFFICIENCY

Radiant heat gas fireplaces are up to 30% more efficient than central forced air systems.

REALISTIC LOGS

High definition, low mass fiber ceramic logs heat up and glow quickly, radiating warmth.

CERAMIC GLASS WINDOW

Durable and robust ceramic glass improves radiant performance.

BIRCH LOGS



1 FIREPLACES

We pride ourselves in beautiful linear fireplaces that also naturally provide the comfort of radiant and convective heat. All viewing areas are 14½" tall.

L1 SEE THRU 40" X 2 VIEW
LONG BEACH DRIFTWOOD 1505DWKV2
FLUTED BLACK LINER 1615FBL
1" ADJUSTABLE TRIM 1575LFB

L1 40" VIEW (ALSO AS L1 SEE-THRU ABOVE)



L2 50" VIEW





L3 64" VIEW





2 FIRE BEDS

We design our expertly crafted media as realistic-looking as possible, and engineer them to harness radiant heat from the flames and glowing embers. Each media set in each fireplace has its own unique appeal.

View our firebed videos at valorfireplaces.com/fireplace-media

L1 40" VIEW
MURANO GLASS 1500DGM
REFLECTIVE LINER 1525RGL
1" ADJUSTABLE TRIM 1575LFB

BIRCH



LONG BEACH DRIFTWOOD





MURANO GLASS



SPLITWOOD



ROCKS AND SHALE (NOT AVAILABLE ON L3)





3 LINERS

Selecting a liner is an important choice, particularly in linear fireplaces where the liner features prominently.

Choose a liner that complements your logs as well as your fireplace's surround. Liners can appear quite different, depending on if the fire is on or off.

Visit a Valor dealer to see a sample in person. Or, view our firebed videos at valorfireplaces.com/fireplace-media

FLUTED BLACK

Provides a graphic contrast, defining the lighter fuel bed and fire.






L2 50" VIEW
ROCK AND SHALE 1714RSS
REFLECTIVE LINER 1725RGL
CLEAN INSTALL KIT 1730CIK


REFLECTIVE BLACK GLASS

High definition glass contrasts and enhances the appearance of the firebed and flames.

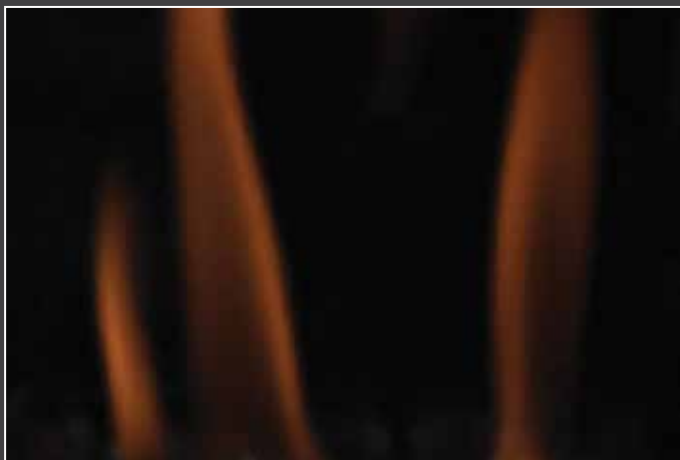

PLAIN BLACK LINER

This liner is painted black for a minimalist, elegant style.

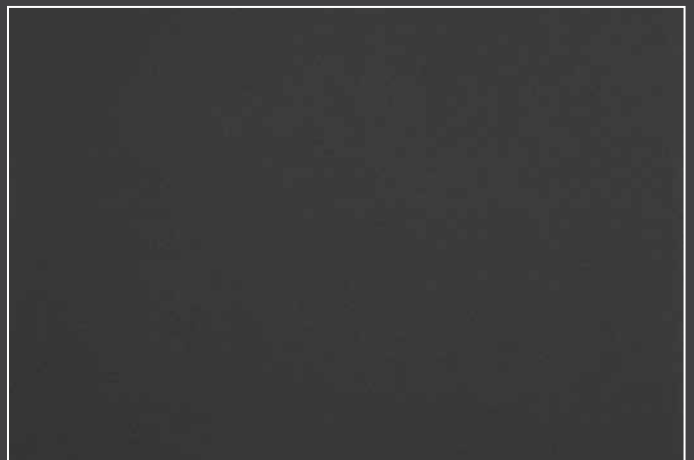

L3 64" VIEW
LONG BEACH DRIFTWOOD 1800DWK
FLUTED BLACK LINER 1815FBL
1" ADJUSTABLE TRIM 1875LFB




4 TRIMS

1" ADJUSTABLE FINISHING TRIM

The 1" trim can be inset but often sits proud of the fireplace wall. This trim's regular mesh lets out 12% more radiant heat and allows more light to escape for a brighter fire.

HeatShift recommended.

We've created two minimalist trims, each with unique attributes to suit your particular installation.

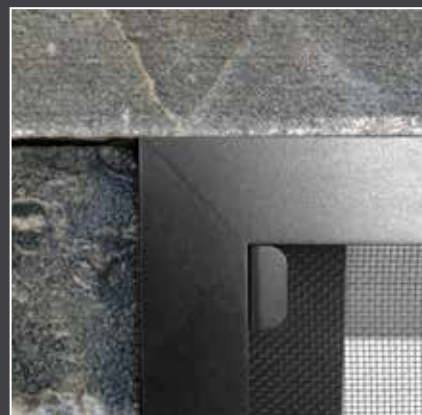

L3 64" VIEW
BIRCH 1800BLK
REFLECTIVE LINER 1825RGL
CLEAN INSTALL KIT 1830CIK



Speak with your local Valor Dealer
or go to valorfireplaces.com to find
out more about our types of trim.



CLEAN INSTALL KIT
(NEW 1¼ depth")

The CIK makes it easier to
finish flush up to the tile
for a clean finish. Our finer
mesh, on the CIK only, is
barely visible.

HeatShift required.



Child Proof your remote
for safety and ease.

Accurately knows the current
temperature of your room.

Set the timer to turn the fireplace
off up to 9 hours ahead.

Set the temperature for
specific times of the day.

Program your fireplace to turn
on and off when you want at
the temperature you want.



STANDARD WITH ALL OUR
LINEAR FIREPLACES.



5 VALOR 10: REMOTE

Standard throughout the Linear Series, Valor's interactive remote control has up-to-the-moment information on the state of your fireplace, such as temperature, and other customizable settings. To find out more, go to valorfireplaces.com/remote



TAKE COMPLETE CONTROL

Increase or decrease flame height to find the perfect ambiance.

Use the color wheel to find the ideal temperature setting.



CONTROL FEATURES

If you have a fan, set the speed of the fan from low to high.

SAVE ON ENERGY COSTS

Save energy while enjoying a changing, realistic flame with ECO mode.

Choose time and the percentage of energy saved is shown in the circle/leaf.



PROGRAM ON THE GO

Program days, times and temperature settings to match your lifestyle.

Set a countdown timer so your fireplace shuts off automatically.

VALOR 10: APP

The Valor 10 remote pairs with the Valor 10 App so you can control your linear fireplace with your smartphone. To find out more, go to valorfireplaces.com/valor10



ZONE HEATING

Looking to heat other areas in your home? Our optional Remote Blower helps manage your heat effectively by distributing warmth to other areas of your home—such as bedrooms, hallways or utility rooms.



6 HEATSHIFT™

KEEPS WALL COOLER

Pioneered by Valor, our unique HeatShift System naturally circulates up to 125 cubic feet of convective heat per minute through hidden ducts and back into the room—avoiding surface areas above the fireplace.

So valued artwork, a TV or construction materials stay cooler—ideal for wood cladding.

IMPROVES PERFORMANCE

Harnessing convective warmth, up to 60% of fireplace heat rises and flows through HeatShift and

back into the room. The remaining radiant heat emanates from the fireplace, keeping you warm.

DESIGN FLEXIBILITY

- Run standard finishing materials right up to the fireplace surround, including drywall, wood, tile, and stone.
- Install mantels lower than usual at a one-to-one ratio of depth to height from the fireplace surround when using HeatShift.
- Several flexible options for construction and design

CONSTRUCTION MADE EASY

Unlike many competing products, HeatShift is built and designed in North America for North American homes, meeting building code requirements.

NO ELECTRICITY REQUIRED


- Heatshift circulates heat naturally using gravity and Valor product ingenuity—no need for a fan or electricity. No power—no problem.
- Valor fully ducts HeatShift for clean, safe air quality.




L1
BIRCH 1505BLKV2
FLUTED BLACK LINER 1515FBL
CLEAN INSTALL KIT 1530CIK




FRONT OUTLET

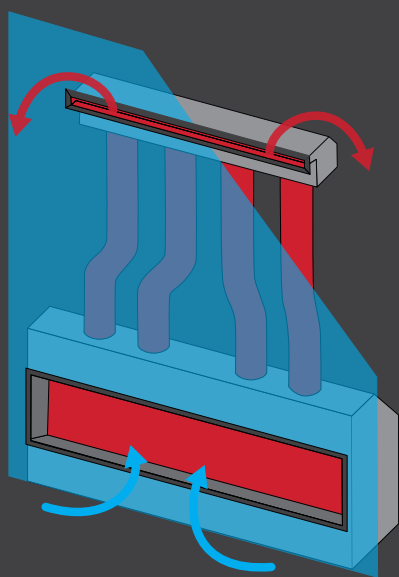

SIDE OUTLETS

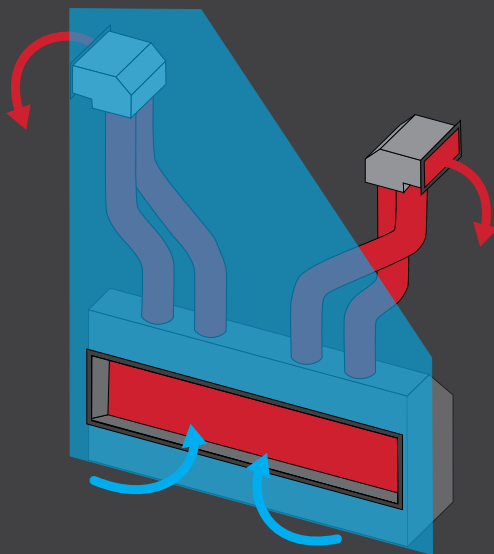


TOP HIDDEN VALANCE

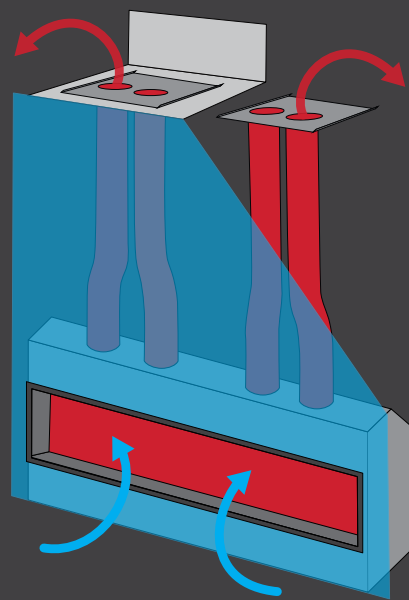


DIMENSIONS

L1

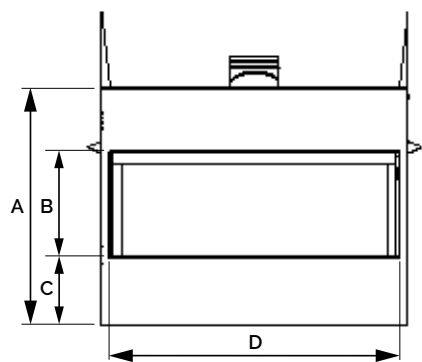

L1 SEE-THRU

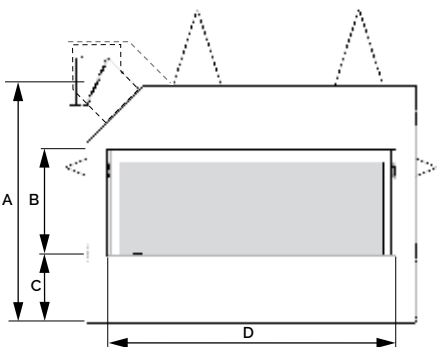

	L1	L1 S-T
A	32 ³ / ₈	33 ¹ / ₈
B	14 ¹ / ₂	14 ¹ / ₂
C	9 ³ / ₈	9 ³ / ₈
D	39 ¹¹ / ₁₆	39 ¹¹ / ₁₆




L1 INSTALL
MANUAL



ALWAYS REFER TO THE MANUAL
FOR COMPLETE AND ACCURATE
INSTALLATION INSTRUCTIONS.
valorfireplaces.com/manuals




L1 SEE-THRU
INSTALL MANUAL

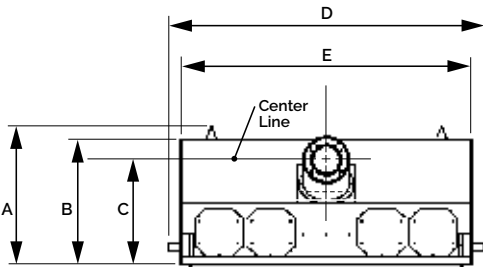

	L1	L1 S-T
A	19 ⁷ / ₈	—
B	18	18 ¹ / ₂
C	15 ¹ / ₁₆	—
D	46	51
E	42	45 ¹ / ₄

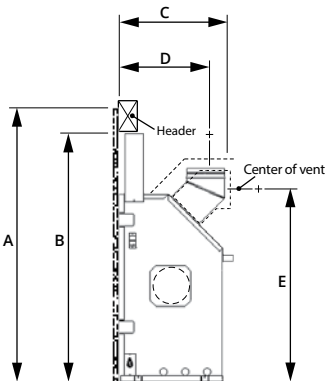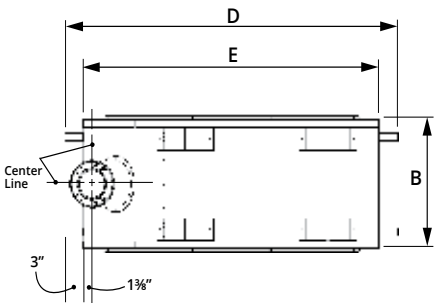

	L1	L1 S-T
A	44 ¹ / ₂ *	44 ¹ / ₂ *
B	43**	43**
C	18 ¹ / ₂	—
D	15 ¹ / ₁₆	—
E	33 ³ / ₈	32 ³ / ₈




*Minimum to top of cement board
**Minimum to underside of header




HOMEOWNER'S MANUAL

L2


L3

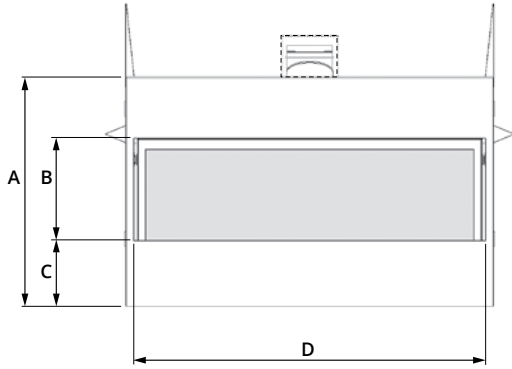

	L2	L3
A	32 $\frac{3}{8}$	32 $\frac{3}{8}$
B	14 $\frac{1}{2}$	14 $\frac{1}{2}$
C	9 $\frac{3}{8}$	9 $\frac{3}{8}$
D	49 $\frac{1}{16}$	64

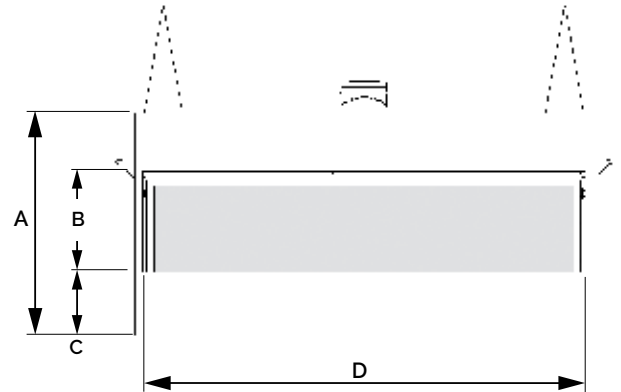



L2 INSTALL MANUAL

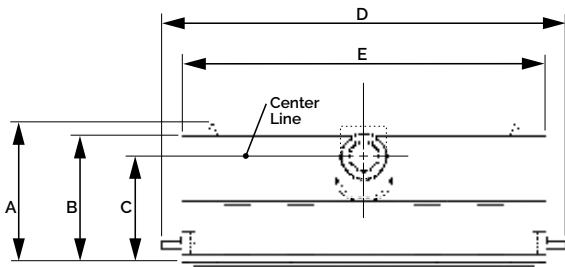


	L2	L3
A	19 $\frac{7}{8}$	20
B	18	18
C	15 $\frac{1}{16}$	15 $\frac{1}{16}$
D	57 $\frac{3}{4}$	72
E	52	66 $\frac{1}{4}$



L3 INSTALL MANUAL

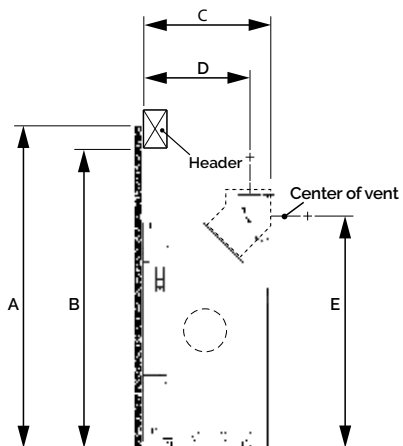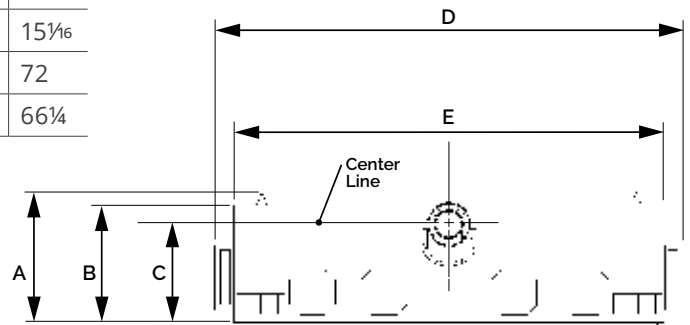

	L2	L3
A	44 $\frac{1}{2}$ *	49 $\frac{3}{8}$ *
B	43**	48**
C	18 $\frac{1}{2}$	18 $\frac{3}{8}$
D	15 $\frac{1}{16}$	15 $\frac{1}{16}$
E	33 $\frac{1}{8}$	—

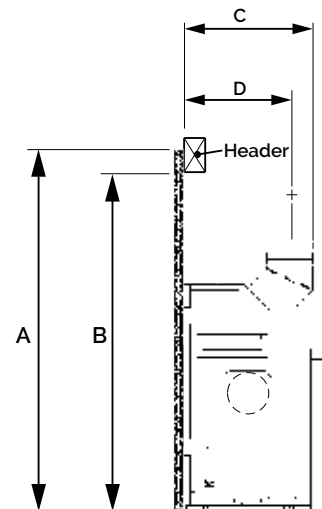

*Minimum to top of cement board
**Minimum to underside of header

SPECIFICATIONS

1 <u>ENGINES DIRECT VENT</u>	<u>L1</u>	<u>L1 S-T</u>	<u>L2</u>	<u>L3</u>
Natural Gas	1500KN	1600KN	1700KN	1800KN
Propane	1500KP	1600KP	1700KP	1800KP

2 <u>FUEL BEDS</u>				
Birch	1505BLKV2	1505BLKV2	1705BLKV2	1800BLK
Long Beach Driftwood	1505DWKV2	1505DWKV2	1705DWKV2	1800DWKV2
Splitwood	1500SWKV2	1500SWKV2	1705SWKV2	1800SWK
Murano Glass	1500DGM	1500DGM	1700DGM	1800DGMV2
Rock and Shale	1514RSS	1514RSS	1714RSS	—

3 <u>LINERS</u>				
Fluted Black	1515FBL	1615FBL	1715FBL	1815FBL
Reflective Glass	1525RGL	1625RGL	1725RGL	1825RGL
Plain Black	1560PBL	n/a	1760PBL	1860PBL

4 <u>TRIMS</u>				
1" Adjustable Trim Black	1575LFB	1575LFB	1775LFB	1875LFB
Clean Install kit*	1530CIK	1530CIK	1730CIK	1830CIK
3½" Black	1550LSBV2	1550LSBV2	—	—
5¼" Black	—	—	1750LSBV2	1850LSB

*requires HeatShift

5 REMOTE CONTROL

Valor 10 Remote	GV60	<i>standard</i>
Valor 10 app	GV60WiFi	<i>optional</i>
Remote Battery and Wall Switch	RBWSK	<i>standard</i>

6 HEATSHIFT (recommended)

Choose from options below:

48" Plenum + optional white Finishing Frame	LDK1 + LDK2
38" Plenum + optional white Finishing Frame	LDK4 + LDK5
30" Plenum + optional white Finishing Frame	LDK9 + LDK10
14" Plenum (2), including white Grilles	LDK3
Top hidden valance	LDK7

OPTIONAL

Outdoor Conversion Kit	GV60CKO
Remote Blower	1270RBK
Circulating Fan (for GV60VM)	1595CFKV2

EFFICIENCY

BTU/Hour	Maximum Input	Minimum Input	Max. Output w/out fan	EnerGuide*
1500KN	30,000	19,000	21,705	66%
1500KP	30,000	21,000	20,409	67%
1600KN	30,000	19,000	22,116	69%
1600KP	30,000	21,000	19,198	69%
1700KN	36,000	21,000	25,916	67%
1700KP	36,000	22,500	25,347	70%
1800KN/KP	42,000	23,000	30,484	67%

Certified to ANSI Z21.88-2017/CSA 2.33-2017 Vented Gas Fireplace Heater American National Standard. CGA-2.17-91 Gas Fired Appliances for use at High Altitudes.



* EnerGuide Ratings and outputs have been determined without a fan/blower, using the CSA P4.1-15 test method.

Use this table to determine the level of efficiency and performance of your fireplace. Rating are based on Valor's top performing fireplaces in each of the column's categories.

⚠ WARNING

This product can expose you to chemicals including Benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm.

For more information go to www.P65Warnings.ca.gov



L2

BIRCH 1705BLKV2

REFLECTIVE GLASS LINER 1725RGL

CLEAN INSTALL KIT 1730CIK

HEATSHIFT LDK 4 + LDK 5



BRLIN24E FEB*

valorfireplaces.com

Valor